

D


D

C

C

B

B

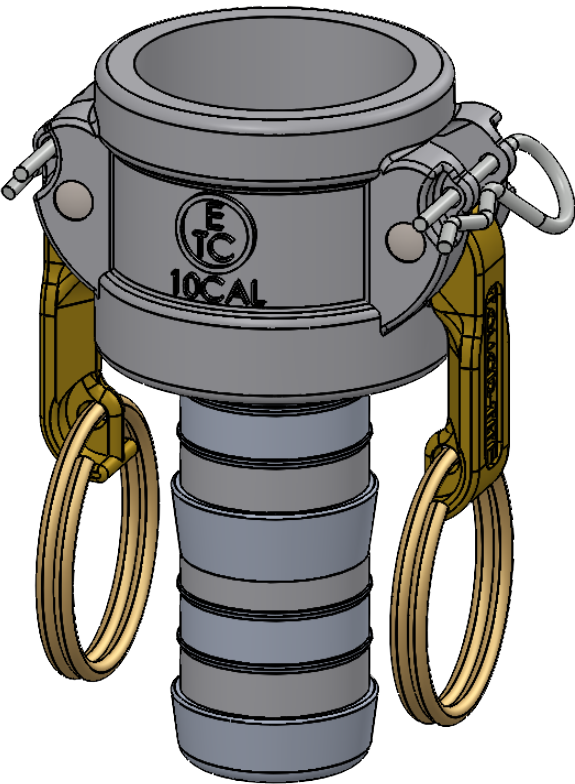

Dimensions to standard A-A-59326/6
(formerly MIL-C-27487G MS27025E)

APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION

5					MATERIAL:	MACHINING TOLERANCES:	UNLESS OTHERWISE SPECIFIED	DRAWN BY	Stephen Adams
4					ALUMINUM BODY	.X ±.03	REMOVE ALL CASTING RESIDUE.	DATE DRAWN:	November 5th 2024
3					BRASS HANDLES	.XX ±.015	BREAK ALL SHARP EDGES.	APPROVED BY:	Andy Heaton
2					SS PINS	.XXX ±.005	DEBURR AFTER MACHINING.	DATE APPROVED:	November 5th 2024
1					PLATED STEEL RINGS	ANGULAR ± 1°	THREADS ARE CLASS 2 FIT.	INFORMATION ON THIS DRAWING IS CONFIDENTIAL. IT MAY NOT BE USED WITHOUT PRIOR WRITTEN CONSENT OF THE OWNER.	
					NITRILE GASKET	RADII 1/16"	DRAFT ANGLE ≤ 2°		
							CONCENTRICITY WITHIN .005		
							CAST FINISH 125-250 RMS.		
							MACHINE FINISH 32-64 RMS.		
							ALL DIMENSIONS IN INCHES.		
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT:	0.45 lb	0.204 kg			



COUPLING PRODUCTS
5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

Part C Aluminum Coupling Half, Female
by Hose Shank (Type VI)
Customer Drawing.

SIZE:	A4	DWG:	3E10CAL-CUST	REV	0
SCALE:	1:4	DO NOT SCALE DRAWING	SHEET 1 OF 1		

A

A