

D

C

B

A

D

C

B

A

6



5

4

3

2

1

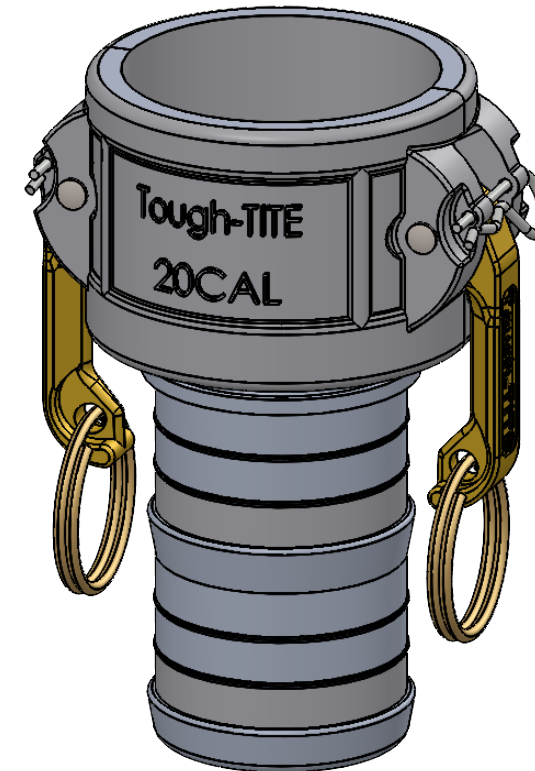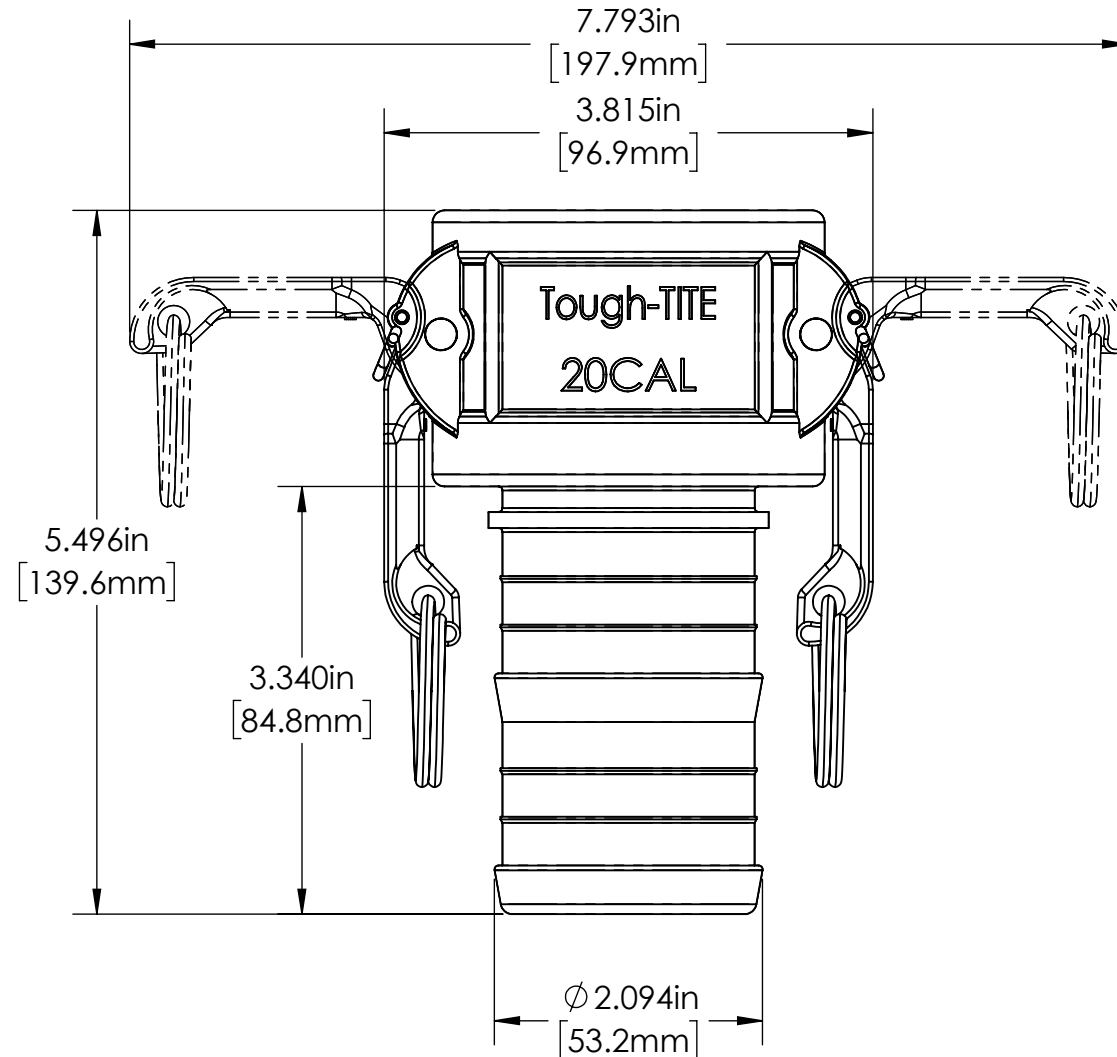

Dimensions to standard A-A-59326/6
(formerly MIL-C-27487G MS27025E)

APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION

5				MATERIAL:	MACHINING TOLERANCES:	UNLESS OTHERWISE SPECIFIED:	DRAWN BY:	Stephen Adams
4				ALUMINUM BODY	.X $\pm .03$	REMOVE ALL CASTING RESIDUE.	DATE DRAWN:	October 23rd 2024
3				BRASS HANDLES	.XX $\pm .015$	BREAK ALL SHARP EDGES.	APPROVED BY:	Andy Heaton
2				SS PINS	.XXX $\pm .005$	DEBURR AFTER MACHINING.	DATE APPROVED:	October 23rd 2024
1				PLATED STEEL RINGS	ANGULAR $\pm 1^\circ$	THREADS ARE CLASS 2 FIT.	INFORMATION ON THIS DRAWING IS CONFIDENTIAL. IT MAY NOT BE USED WITHOUT PRIOR WRITTEN CONSENT OF THE OWNER.	
				NITRILE GASKET	RADII 1/16"	DRAFT ANGLE $\leq 2^\circ$		
				WEIGHT: 1.24 lb 0.562 kg		CONCENTRICITY WITHIN .005		
						CAST FINISH 125-250 RMS.		
						MACHINE FINISH 32-64 RMS.		
						ALL DIMENSIONS IN INCHES.		

apg **Tough-TITE**

COUPLING PRODUCTS

5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

Part C Aluminum Coupling Half, Female
by Hose Shank (Type VI)
Customer Drawing.

SIZE: A4	DWG: 3E20CAL-CUST	REV 0
SCALE: 1:4	DO NOT SCALE DRAWING	SHEET 1 OF 1

6

5

4

3

2

1