

D



D

C

C

B

B

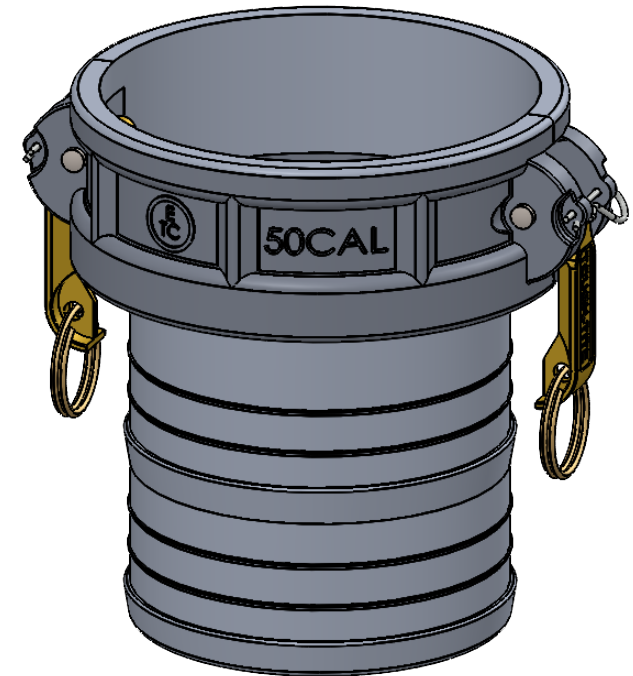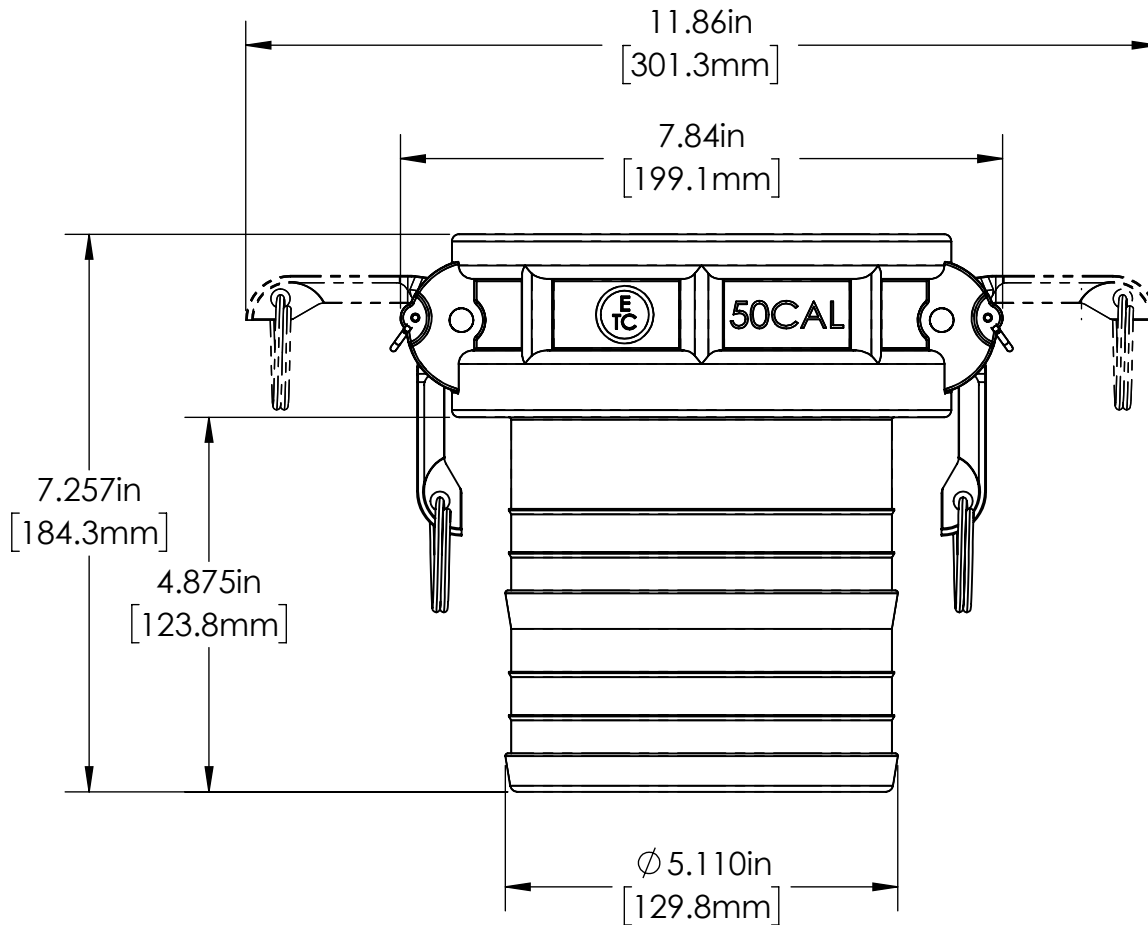

Dimensions to standard A-A-59326/6
(formerly MIL-C-27487G MS27025E)

APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION

5				MATERIAL: ALUMINUM BODY BRASS HANDLES SS PINS PLATED STEEL RINGS NITRILE GASKET	MACHINING TOLERANCES: .X ±.03 .XX ±.015 .XXX ±.005 ANGULAR ± 1° RADII 1/16"	UNLESS OTHERWISE SPECIFIED: REMOVE ALL CASTING RESIDUE. BREAK ALL SHARP EDGES. DEBURR AFTER MACHINING. THREADS ARE CLASS 2 FIT. DRAFT ANGLE ≤ 2° CONCENTRICITY WITHIN .005 CAST FINISH 125-250 RMS. MACHINE FINISH 32-64 RMS. ALL DIMENSIONS IN INCHES.	DRAWN BY: Stephen Adams DATE DRAWN: May 15th 2025 APPROVED BY: Andy Heaton DATE APPROVED: May 15th 2025 INFORMATION ON THIS DRAWING IS CONFIDENTIAL. IT MAY NOT BE USED WITHOUT PRIOR WRITTEN CONSENT OF THE OWNER.
4							
3							
2							
1							
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT: 3.78 lb 1.715 kg			

apg **Tough-TITE**
COUPLING PRODUCTS

5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

Part C Aluminum Coupling Half, Female
by Hose Shank (Type VI)
Customer Drawing.

SIZE: A4	DWG: 3E50CAL-CUST	REV 0
SCALE: 1:4	DO NOT SCALE DRAWING	SHEET 1 OF 1

A

A

6

5

4

3

2

1