



4

3

2

1

PART #	Inch/lbs							Millimetres/kg						
	Part Dimensions					Rec. Hose Dia		Part Dimensions					Rec. Hose Dia	
	[ID]	L	OD	T	Mass	Min	Max	[ID]	L	OD	T	Mass	Min	Max
307CRSAAL	1.150	1.50	1.280	0.065	0.036	1 1/32	1 1/8	29.2	38.1	32.5	1.7	0.016	26.2	28.6
307CRSBAL	1.300	1.50	1.430	0.065	0.041	1 3/32	1 15/64	33.0	38.1	36.3	1.7	0.018	27.8	31.4
310CRSAAL	1.622	1.75	1.750	0.064	0.058	1 29/64	1 35/64	41.2	44.5	44.5	1.6	0.026	36.9	39.3
310CRSBAL	1.770	1.75	1.900	0.065	0.064	1 9/16	1 11/16	45.0	44.5	48.3	1.7	0.029	39.7	42.9
310CRSCAL	1.870	2.00	2.000	0.065	0.077	1 21/32	1 25/32	47.5	50.8	50.8	1.7	0.035	42.1	45.2
312CRSAAL	2.000	2.00	2.130	0.065	0.082	1 39/64	1 15/16	50.8	50.8	54.1	1.7	0.037	40.9	49.2
312CRSBAL	2.100	2.00	2.230	0.065	0.086	1 29/32	2 1/32	53.3	50.8	56.6	1.7	0.039	48.4	51.6
315CRSAAL	2.340	2.00	2.500	0.080	0.119	1 15/16	2 3/16	59.4	50.8	63.5	2.0	0.054	49.2	55.6
315CRSCAL	2.450	2.00	2.616	0.083	0.129	2 5/16	2 13/32	62.2	50.8	66.4	2.1	0.058	58.7	61.1
320CRSAAL	2.709	2.25	2.875	0.083	0.160	2 15/32	2 11/16	68.8	57.2	73.0	2.1	0.072	62.7	68.3
320CRSBAL	2.885	2.25	3.125	0.120	0.249	2 21/32	2 27/32	73.3	57.2	79.4	3.0	0.113	67.5	72.2
320CRSCAL	3.085	2.25	3.325	0.120	0.265	2 25/32	3	78.4	57.2	84.5	3.0	0.120	70.6	76.2
325CRSAAL	3.260	2.75	3.500	0.120	0.342	2 31/32	3 7/32	82.8	69.9	88.9	3.0	0.155	75.4	81.8
325CRSCAL	3.518	3.00	3.750	0.116	0.388	3 1/4	3 31/64	89.4	76.2	95.3	2.9	0.176	82.6	88.5
330CRSAAL	3.768	3.00	4.000	0.116	0.414	3 15/32	3 23/32	95.7	76.2	101.6	2.9	0.188	88.1	94.5
330CRSBAL	3.893	3.00	4.125	0.116	0.428	3 47/64	3 27/32	98.9	76.2	104.8	2.9	0.194	94.9	97.6
330CRSCAL	4.010	3.00	4.250	0.120	0.456	3 7/8	4	101.9	76.2	108.0	3.0	0.207	98.4	101.6
330CRSDAL	4.375	3.00	4.615	0.120	0.496	4	4 1/4	111.1	76.2	117.2	3.0	0.225	101.6	108.0
340CRSAAL	4.768	3.00	5.000	0.116	0.521	4 5/8	4 47/64	121.1	76.2	127.0	2.9	0.236	117.5	120.3
340CRSBAL	5.018	3.00	5.250	0.116	0.548	4 3/4	4 7/8	127.5	76.2	133.4	2.9	0.248	120.7	123.8
350CRSAAL	5.540	4.45	5.780	0.120	0.926	5 1/4	5 1/4	140.7	113.0	146.8	3.0	0.420	133.4	133.4
360CRSAAL	6.750	5.00	7.100	0.175	1.857	6 1/4	6 3/4	171.5	127.0	180.3	4.4	0.842	158.8	171.5
360CRSBAL	7.250	5.00	7.600	0.175	1.991	6 31/64	7 3/16	184.2	127.0	193.0	4.4	0.903	164.7	182.6
380CRSAAL4	9.100	4.00	9.450	0.175	1.990	8 5/16	8 15/16	231.1	101.6	240.0	4.4	0.902	211.1	227.0
380CRSAAL6	9.100	6.00	9.450	0.175	2.984	8 5/16	8 15/16	231.1	152.4	240.0	4.4	1.354	211.1	227.0
380CRSBAL4	9.750	4.00	10.100	0.175	2.129	8 61/64	9 1/2	247.7	101.6	256.5	4.4	0.966	227.4	241.3
380CRSBAL6	9.750	6.00	10.100	0.175	3.194	8 61/64	9 1/2	247.7	152.4	256.5	4.4	1.449	227.4	241.3

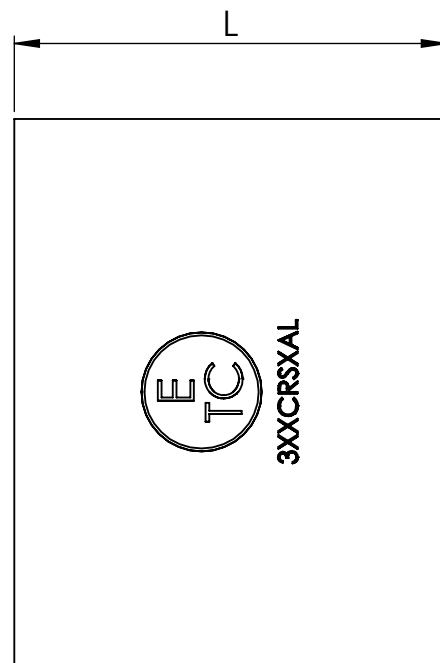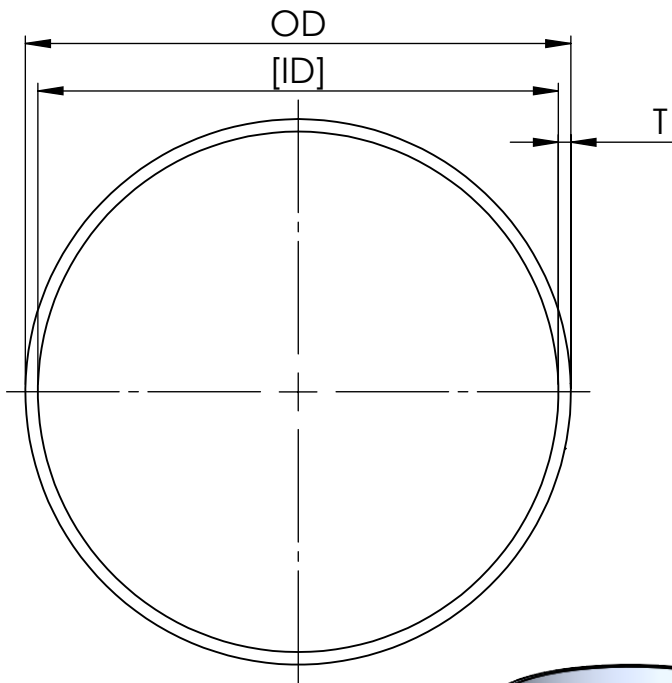

4				MATERIAL: Seamless Aluminum	DRAWN BY: Stephen Adams	apg EVER-TITE® COUPLING PRODUCTS 5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA Crimp Sleeves Aluminum CUSTOMER DRAWING			
3					DATE DRAWN: September 11th 2025				
2					APPROVED BY: Andy Heaton				
1					DATE APPROVED: September 11th 2025				
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT: See table	APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION	SIZE: A4	DWG: 3XXCRSXL-CUST	REV	0
						DO NOT SCALE DRAWING		SHEET 1 OF 1	

4

3

2

1