



4 3 2 1

F
E
D
C
B
A

F
E
D
C
B
A

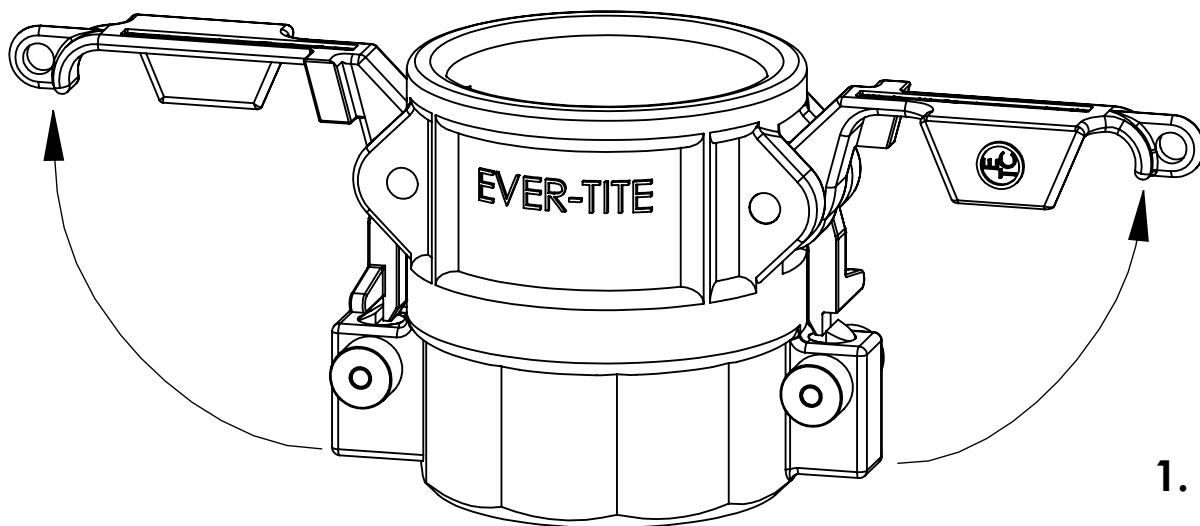

1.

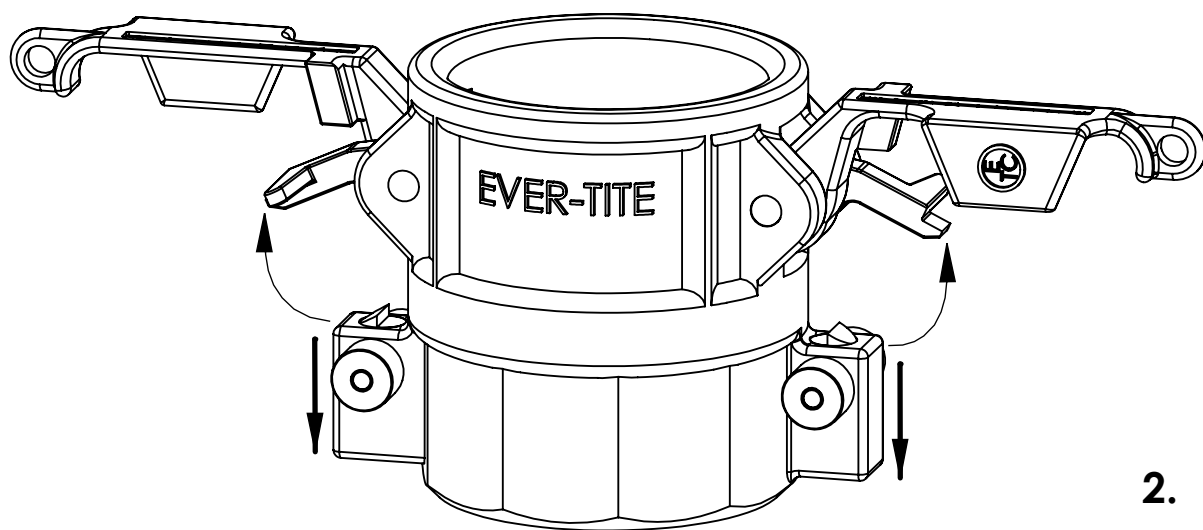

2.

Double Locking Handle Pressure Bleed-off Coupler

1. Lift up the outer set of handles into the bleed-off position while the locked inner handles hold the adapter within the coupling.
2. When fully bled-off, pull down on the latch button to release the inner set of handles, held by the spring-loaded latch, allowing the coupling to be fully disconnected

 COUPLING PRODUCTS 5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA			
Double Locking Handle Coupling Half Female by Internal NPT Thread CUSTOMER DRAWING			
SIZE: A4	DWG: 3XXDLHXX101-CUST	REV 0	
DO NOT SCALE DRAWING		SHEET 1 OF 2	

4				MATERIAL: BODY - SEE TABLE SS HANDLES SS PINS SS BUTTONS NITRILE GASKET	DRAWN BY: Stephen Adams
3					DATE DRAWN: January 18th 2026
2					APPROVED BY: Andy Heaton
1					DATE APPROVED: January 18th 2026
					APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT: SEE TABLE	

4 3 2 1



4

3

2

1

NB	Part No.	F	AF	L	W1	W2	Mass	AF	L	W1	W2	Mass
		(number)	(inches)				(lbs)	(mm)				(kg)
Aluminum Body												
1.1/2"	315DLHAL101	10	2.266	3.216	4.289	8.557	1.06	57.6	81.7	108.9	217.3	0.481
2"	320DLHAL101	10	2.734	3.383	4.631	8.899	1.40	69.4	85.9	117.6	226.0	0.635
3"	330DLHAL101	8	3.859	3.547	5.835	10.686	2.10	98.0	90.1	148.2	271.4	0.953
4"	340DLHAL101	8	4.969	3.908	6.938	11.789	3.20	126.2	99.3	176.2	299.4	1.451
Stainless Steel Body												
1"	310DLHSS101	10	1.500	2.406	3.289	6.686	1.02	38.1	61.1	83.5	169.8	0.463
1.1/2"	315DLHSS101	10	2.250	2.422	4.289	8.557	2.10	57.1	61.5	108.9	217.3	0.953
2"	320DLHSS101	10	2.688	3.063	4.631	8.899	2.29	68.3	77.8	117.6	226.0	1.039
2.1/2"	325DLHSS101	10	3.313	3.188	5.129	9.397	2.98	84.2	81.0	130.3	238.7	1.352
3"	330DLHSS101	8	3.844	3.938	5.835	10.686	4.73	97.6	100.0	148.2	271.4	2.145
4"	340DLHSS101	8	5.000	3.891	6.938	11.789	6.00	127.0	98.8	176.2	299.4	2.722
Forged Brass Body												
1"	310DLHFBR101	10	1.750	2.406	3.289	6.686	1.27	44.4	61.1	83.5	169.8	0.576
1.1/2"	315DLHFBR101	10	2.281	3.372	4.289	8.557	2.73	57.9	85.6	108.9	217.3	1.238
2"	320DLHFBR101BU	10	2.875	3.406	4.631	8.899	3.14	73.0	86.5	117.6	226.0	1.424
2.1/2"	325DLHFBR101	10	3.313	3.383	5.129	9.397	3.45	84.2	85.9	130.3	238.7	1.565

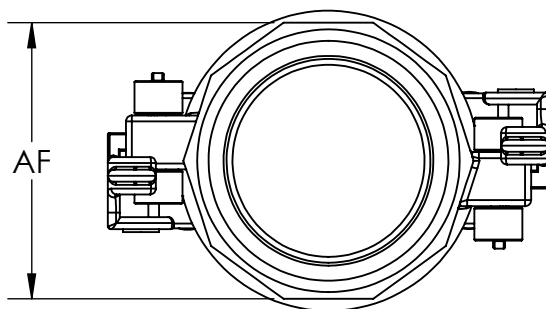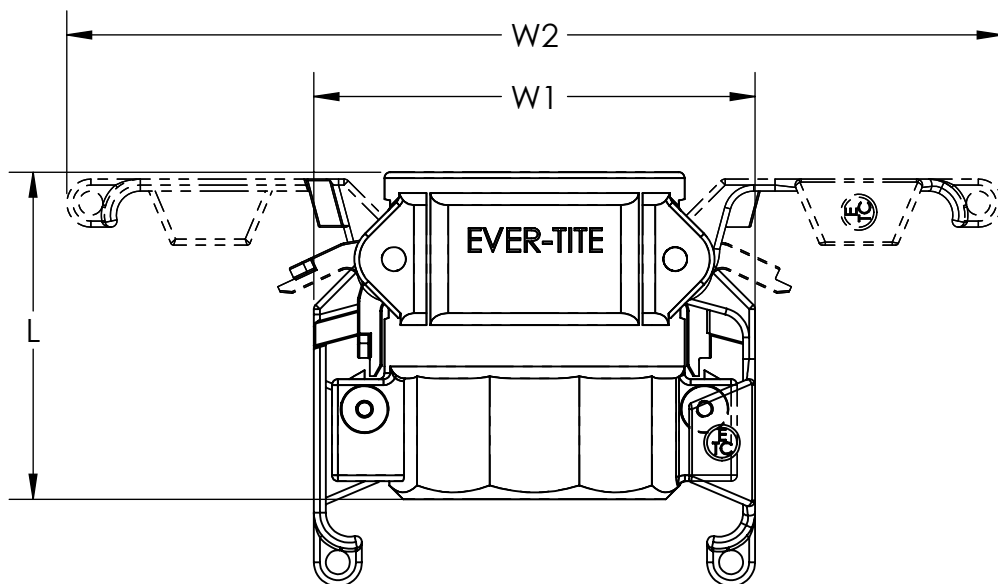

F=Number
of Flats

MATERIALS AND CONNECTIONS TO STANDARD A-A-59326
(FORMERLY MIL-C-27487G)

apg EVER-TITE®
COUPLING PRODUCTS
5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

4				MATERIAL: BODY - SEE TABLE SS HANDLES SS PINS SS BUTTONS NITRILE GASKET	DRAWN BY: Stephen Adams		Double Locking Handle Coupling Half Female by Internal NPT Thread CUSTOMER DRAWING		
3					DATE DRAWN: January 18th 2026				
2					APPROVED BY: Andy Heaton				
1					DATE APPROVED: January 18th 2026				
					APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION		SIZE: A4	DWG: 3XXDLHXX101-CUST	
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT: SEE TABLE				DO NOT SCALE DRAWING	SHEET 2 OF 2

4

3

2

1