

D

C

B


A

D

C

B

A

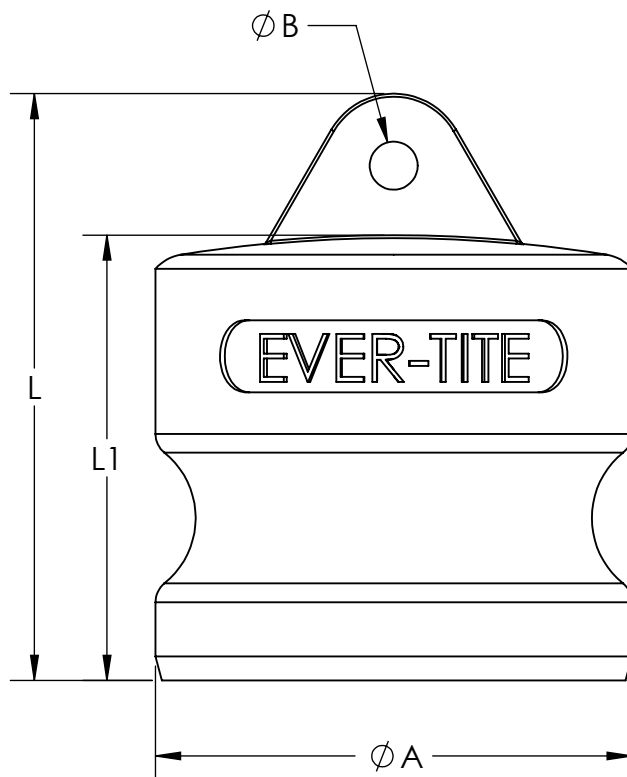

NB	Part No.	Ø A	Ø B	L	L1	Mass
		(inches)				(lbs)
1/2"	305DPAL	1.000	0.188	1.406	1.031	0.05
3/4"	307DPAL	1.261	0.203	1.563	1.125	0.10
1"	310DPAL	1.443	0.250	1.917	1.328	0.15
1.1/4"	312DPAL	1.790	0.250	2.278	1.563	0.25
1.1/2"	315DPAL	2.100	0.250	2.625	1.753	0.25
2"	320DPAL	2.482	0.250	2.786	2.036	0.45
2.1/2"	325DPAL	2.982	0.250	2.734	1.938	0.60
3"	330DPAL	3.600	0.281	2.973	2.098	0.65
4"	340DPAL	4.705	0.250	3.239	2.364	1.40
5"	350DPAL	5.723	0.250	3.344	2.344	1.55
6"	360DPAL	6.926	0.313	3.864	2.614	2.25
8"	380DPAL	9.105	0.375	5.687	4.062	5.13
NB	Part No.	Ø A	Ø B	L	L1	Mass
		(mm)				(kg)
1/2"	305DPAL	25.4	4.8	35.7	26.2	0.02
3/4"	307DPAL	32.0	5.2	39.7	28.6	0.05
1"	310DPAL	36.7	6.4	48.7	33.7	0.07
1.1/4"	312DPAL	45.5	6.4	57.9	39.7	0.11
1.1/2"	315DPAL	53.3	6.4	66.7	44.5	0.11
2"	320DPAL	63.0	6.4	70.8	51.7	0.20
2.1/2"	325DPAL	75.7	6.4	69.5	49.2	0.27
3"	330DPAL	91.4	7.1	75.5	53.3	0.29
4"	340DPAL	119.5	6.4	82.3	60.0	0.64
5"	350DPAL	145.4	6.4	84.9	59.5	0.70
6"	360DPAL	175.9	7.9	98.1	66.4	1.02
8"	380DPAL	231.3	9.5	144.4	103.2	2.33

DIMENSIONS TO STANDARD A-A-59326/11
(FORMERLY MIL-C-27487G MS27029E)
EXCEPT 1/2", 5" AND 8"

APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION

5					MATERIAL: ALUMINUM BODY	MACHINING TOLERANCES: .X ±.03 .XX ±.015 .XXX ±.005 ANGULAR ± 1° RADI 1/16"	UNLESS OTHERWISE SPECIFIED: REMOVE ALL CASTING RESIDUE. BREAK ALL SHARP EDGES. DEBURR AFTER MACHINING. THREADS ARE CLASS 2 FIT. DRAFT ANGLE ≤ 2° CONCENTRICITY WITHIN .005 CAST FINISH 125-250 RMS. MACHINE FINISH 32-64 RMS. ALL DIMENSIONS IN INCHES.
4							
3							
2							
1							
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT:	SEE TABLE		

apg **EVER-TITE®**
COUPLING PRODUCTS
5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

Part DP Aluminum Coupling Half,
Plug, Dust (Type X).
Customer Drawing.

SIZE: A4	DWG: 3XXDPAL-CUST	REV 0
SCALE: 1:2	DO NOT SCALE DRAWING	SHEET 1 OF 1