

4

3


2

1


DIM [D] =
ADDITIONAL
LENGTH OF
ASSEMBLY

SECTION A-A

DIM [C] =
EFFECTIVE ADDITIONAL
LENGTH OF ASSEMBLY
WHEN COUPLED

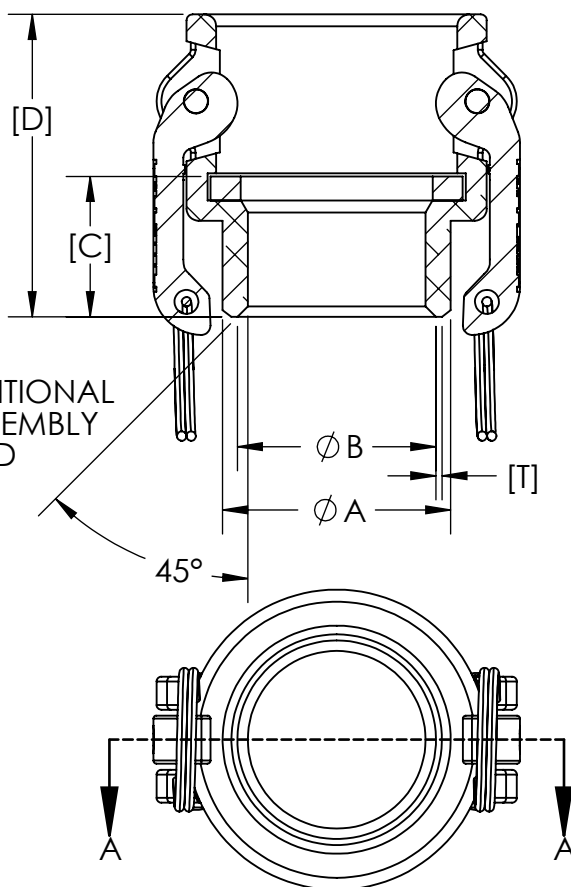

NB	Part No.	Ø A	Ø B	[T]	[C]	[D]	Mass
		(inches)					(lbs)
1/2"	305DBWALP40	0.840	0.622	.0625	1.044	1.92	0.17
3/4"	307DBWALP40	1.050	0.824	.0625	1.267	2.19	0.30
1"	310DBWALP40	1.315	1.049	.0625	1.370	2.51	0.38
1.1/4"	312DBWALP40	1.660	1.380	.0625	1.514	2.92	0.64
1.1/2"	315DBWALP40	1.900	1.610	.0625	1.414	2.82	0.64
2"	320DBWALP40	2.375	2.067	.0625	1.462	3.15	0.90
2.1/2"	325DBWALP40	2.875	2.469	.0625	1.666	3.40	1.28
3"	330DBWALP40	3.500	3.068	.0625	1.727	3.54	1.71
4"	340DBWALP40	4.500	4.029	.0625	2.126	4.02	2.22
5"	350DBWALP40	5.563	5.047	.0625	2.112	4.05	2.74
6"	360DBWALP40	6.625	6.065	.0625	2.326	4.42	4.36
8"	380DBWALP40	8.625	7.981	.0625	2.906	6.00	13.89
NB	Part No.	Ø A	Ø B	[T]	[C]	[D]	Mass
		(mm)					(kg)
1/2"	305DBWALP40	21.3	15.8	1.6	26.5	48.8	0.077
3/4"	307DBWALP40	26.7	20.9	1.6	32.2	55.6	0.136
1"	310DBWALP40	33.4	26.6	1.6	34.8	63.8	0.172
1.1/4"	312DBWALP40	42.2	35.1	1.6	38.5	74.2	0.290
1.1/2"	315DBWALP40	48.3	40.9	1.6	35.9	71.6	0.290
2"	320DBWALP40	60.3	52.5	1.6	37.1	80.0	0.408
2.1/2"	325DBWALP40	73.0	62.7	1.6	42.3	86.4	0.581
3"	330DBWALP40	88.9	77.9	1.6	43.9	89.9	0.776
4"	340DBWALP40	114.3	102.3	1.6	54.0	102.1	1.007
5"	350DBWALP40	141.3	128.2	1.6	53.6	102.9	1.243
6"	360DBWALP40	168.3	154.1	1.6	59.1	112.3	1.978
8"	380DBWALP40	219.1	202.7	1.6	73.8	152.4	6.300

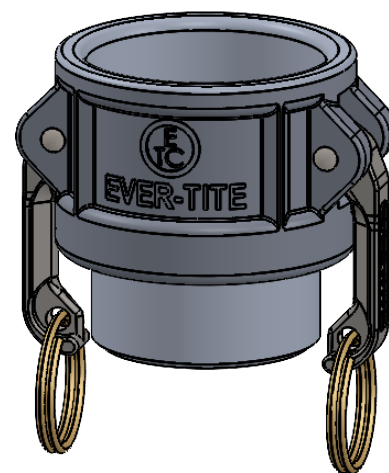

Pipe schedule to ASTM B36.10

See 3XXDAL-CUST for overall part dimensions.

It is recommended to remove seals during welding.

apg EVER-TITE
COUPLING PRODUCTS
5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

Part DBW Aluminum Coupling Half,
Female by Schedule 40 Pipe Butt Weld
CUSTOMER DRAWING

4				MATERIAL: ALUMINUM BODY SS HANDLES SS PINS SS RINGS NITRILE GASKET
3				
2				
1				
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT: See table



DO NOT SCALE DRAWING

SHEET 1 OF 1

4

3

2

1