

4

3

2

1

F

F

E

E

D

D

C


C

B


B

A

A

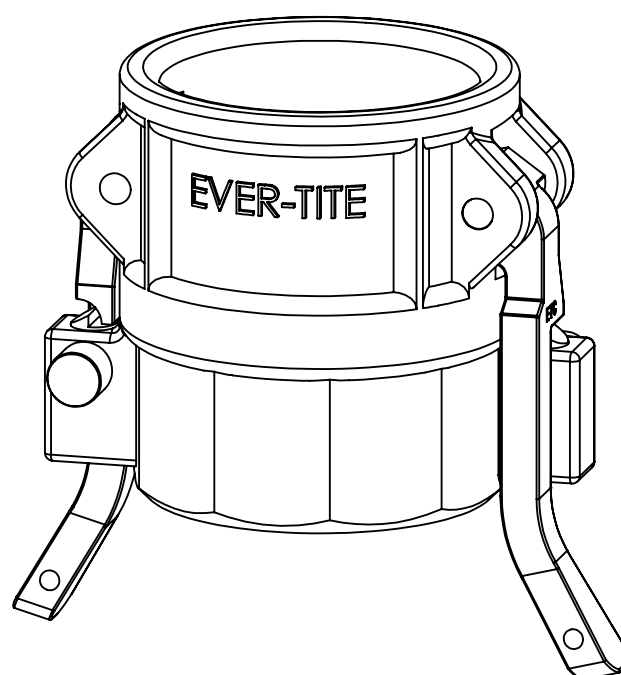

1.

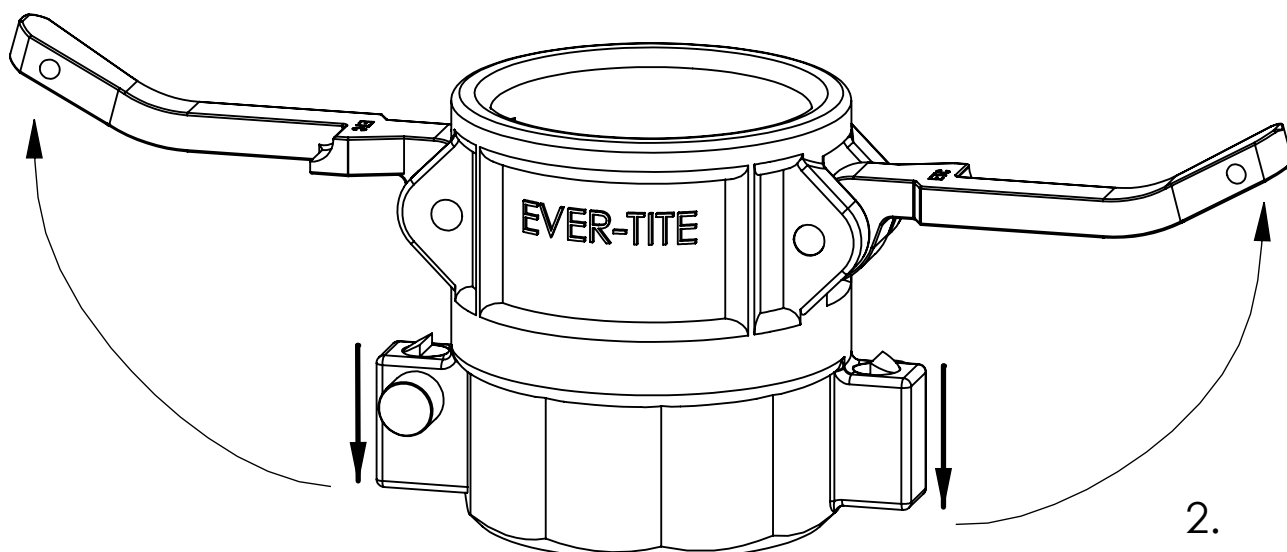

2.

Positive Locking Handle Coupler

1. Coupling and male adapter in the locked position. The handles cannot be inadvertently pulled open.
2. To release the lock, pull down on the latch buttons and then lift up the handles.



EVER-TITE®
COUPLING PRODUCTS
5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

Positive Locking Handle Coupling Half
Female by Internal NPT Thread
CUSTOMER DRAWING

SIZE: A4	DWG: 3XXDLHXX102-CUST	REV 0
DO NOT SCALE DRAWING		SHEET 1 OF 2

4				MATERIAL: BODY - SEE TABLE SS HANDLES SS PINS SS BUTTONS NITRILE GASKET	DRAWN BY: Stephen Adams
3					DATE DRAWN: January 20th 2026
2					APPROVED BY: Andy Heaton
1					DATE APPROVED: January 20th 2026
					APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT: SEE TABLE	

4

3

2

1



4

3

2

1

NB	Part No.	F	AF	L	W1	W2	Mass	AF	L	W1	W2	Mass
		(number)	(inches)				(lbs)	(mm)				(kg)
Aluminum Body												
1.1/2"	315DLHAL102	10	2.266	3.216	4.728	10.168	1.06	57.6	81.7	120.1	258.3	0.481
2"	320DLHAL102	10	2.734	3.383	5.070	10.510	1.40	69.4	85.9	128.8	267.0	0.635
3"	330DLHAL102	8	3.859	3.547	6.147	10.366	2.10	98.0	90.1	156.1	263.3	0.953
4"	340DLHAL102	8	4.969	3.908	7.250	11.469	3.20	126.2	99.3	184.1	291.3	1.451
Stainless Steel Body												
1"	310DLHSS102	10	1.500	2.406	2.748	6.089	1.02	38.1	61.1	69.8	154.7	0.463
1.1/2"	315DLHSS102	10	2.250	2.422	4.728	10.168	2.10	57.1	61.5	120.1	258.3	0.953
2"	320DLHSS102	10	2.688	3.063	5.070	10.510	2.29	68.3	77.8	128.8	267.0	1.039
2.1/2"	325DLHSS102	10	3.313	3.188	5.568	11.008	2.98	84.2	81.0	141.4	279.6	1.352
3"	330DLHSS102	8	3.844	3.938	6.147	10.366	4.73	97.6	100.0	156.1	263.3	2.145
4"	340DLHSS102	8	5.000	3.891	7.250	11.469	6.00	127.0	98.8	184.1	291.3	2.722
Forged Brass Body												
1"	310DLHFBR102	10	1.750	2.406	2.748	6.089	1.27	44.4	61.1	69.8	154.7	0.576
1.1/2"	315DLHFBR102	10	2.281	3.372	4.728	10.168	2.73	57.9	85.6	120.1	258.3	1.238
2"	320DLHFBR102	10	2.875	3.406	5.070	10.510	3.14	73.0	86.5	128.8	267.0	1.424
2.1/2"	325DLHFBR102	10	3.313	3.383	5.568	11.008	3.45	84.2	85.9	141.4	279.6	1.565

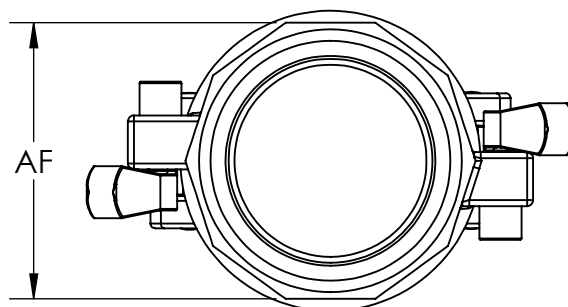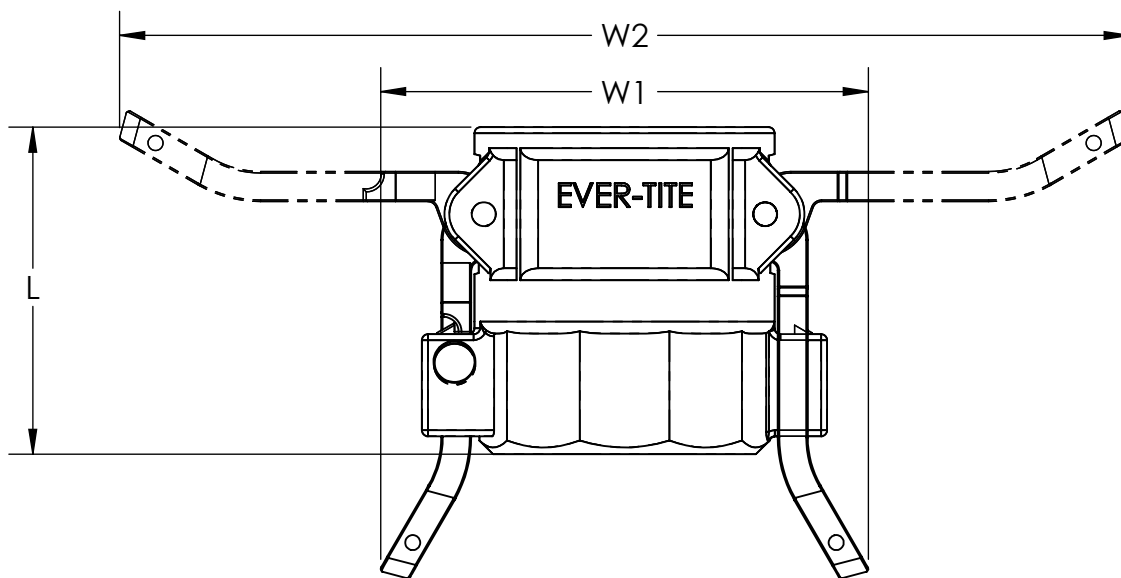

F=Number
of Flats

MATERIALS AND CONNECTIONS TO STANDARD A-A-59326
(FORMERLY MIL-C-27487G)

apg EVER-TITE®
COUPLING PRODUCTS
5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

Positive Locking Handle Coupling Half
Female by Internal NPT Thread
CUSTOMER DRAWING

4				MATERIAL: BODY - SEE TABLE SS HANDLES SS PINS SS BUTTONS NITRILE GASKET	DRAWN BY: Stephen Adams
3					DATE DRAWN: January 20th 2026
2					APPROVED BY: Andy Heaton
1					DATE APPROVED: January 20th 2026
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT: SEE TABLE	APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION

SIZE: A4	DWG: 3XXDLHXX102-CUST	REV 0
DO NOT SCALE DRAWING		SHEET 2 OF 2

4

3

2

1