

D

C

B


A

D

C

B

A

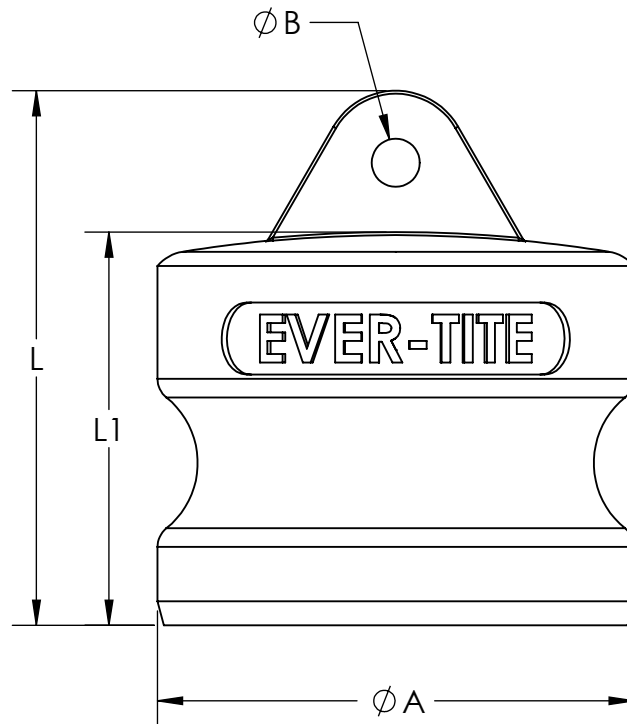

BODY MATERIAL:
FORGED BRASS
EXCEPT WHERE NOTED
*: CAST RED BRASS

NB	Part No.	ϕ A	ϕ B	L	L1	Mass
		(inches)				(lbs)
1/2"	305DPBR	0.958	0.188	1.567	1.031	0.16
3/4"	307DPBR	1.262	0.250	1.500	1.063	0.31
1"	310DPBR	1.444	0.250	1.962	1.350	0.27
1.1/4"	312DPBR	1.790	0.250	2.281	1.563	1.08
1.1/2"	315DPBR	2.102	0.250	2.341	1.750	1.21
2"	320DPBR	2.482	0.250	2.579	1.988	1.72
2.1/2"	325DPBR	2.982	0.250	2.564	1.876	1.24
3"	330DPBR	3.602	0.250	2.741	2.150	3.09
4"	340DPBR	4.705	0.250	2.867	2.276	5.29
5"	350DPRB*	5.723	0.293	3.241	2.241	4.99
6"	360DPRB*	6.926	0.313	3.773	2.523	8.08
NB	Part No.	ϕ A	ϕ B	L	L1	Mass
		(mm)				(kg)
1/2"	305DPBR	24.3	4.8	39.8	26.2	0.07
3/4"	307DPBR	32.1	6.4	38.1	27.0	0.14
1"	310DPBR	36.7	6.4	49.8	34.3	0.12
1.1/4"	312DPBR	45.5	6.4	57.9	39.7	0.49
1.1/2"	315DPBR	53.4	6.4	59.5	44.5	0.55
2"	320DPBR	63.0	6.4	65.5	50.5	0.78
2.1/2"	325DPBR	75.7	6.4	65.1	47.7	0.56
3"	330DPBR	91.4	6.4	69.6	54.6	1.40
4"	340DPBR	119.5	6.4	72.8	57.8	2.40
5"	350DPRB*	145.4	7.4	82.3	56.9	2.26
6"	360DPRB*	175.9	7.9	95.8	64.1	3.67

DIMENSIONS TO STANDARD A-A-59326/11
(FORMERLY MIL-C-27487G MS27029E)
EXCEPT 1/2" AND 5"

APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION

5					MATERIAL: SEE NOTE BODY	MACHINING TOLERANCES: .X $\pm$.03 .XX $\pm$.015 .XXX $\pm$.005 ANGULAR $\pm$ 1° RADII 1/16"	UNLESS OTHERWISE SPECIFIED: REMOVE ALL CASTING RESIDUE. BREAK ALL SHARP EDGES. DEBURR AFTER MACHINING. THREADS ARE CLASS 2 FIT. DRAFT ANGLE $\leq$ 2° CONCENTRICITY WITHIN .005 CAST FINISH 125-250 RMS. MACHINE FINISH 32-64 RMS. ALL DIMENSIONS IN INCHES.
4							
3							
2							
1							
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT:	SEE TABLE		

apg **EVER-TITE**
COUPLING PRODUCTS
5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

Part DP Brass Coupling Half,
Plug, Dust (Type X).
Customer Drawing.

SIZE: A4	DWG: 3XXDPBR-CUST	REV 0
SCALE: 1:2	DO NOT SCALE DRAWING	SHEET 1 OF 1

6

5

4

3

2

1