

4


3

2


1

DIM [D] =
ADDITIONAL
LENGTH OF
ASSEMBLY


SECTION A-A

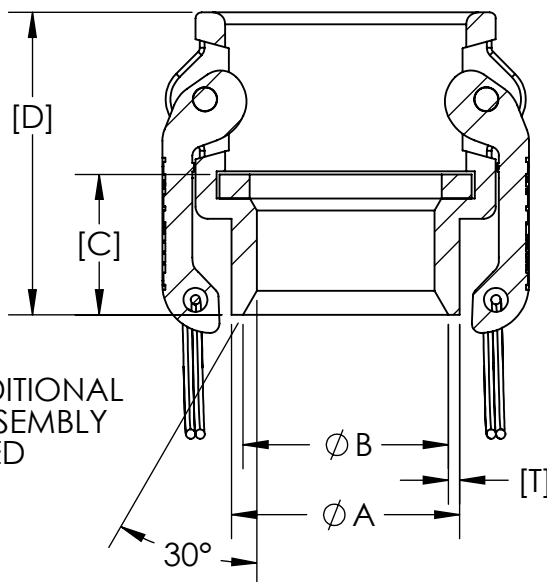

DIM [C] =
EFFECTIVE ADDITIONAL
LENGTH OF ASSEMBLY
WHEN COUPLED

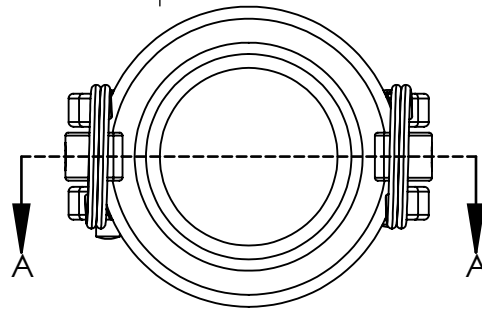

NB	Part No.	ϕA	ϕB	[T]	[C]	[D]	Mass
		(inches)					(lbs)
1/2"	305DBWALP10	0.840	0.674	0.083	1.044	1.92	0.17
3/4"	307DBWALP10	1.050	0.884	0.083	1.267	2.19	0.30
1"	310DBWALP10	1.315	1.097	0.109	1.370	2.51	0.38
1.1/4"	312DBWALP10	1.660	1.442	0.109	1.514	2.92	0.64
1.1/2"	315DBWALP10	1.900	1.682	0.109	1.414	2.82	0.64
2"	320DBWALP10	2.375	2.157	0.109	1.462	3.15	0.90
2.1/2"	325DBWALP10	2.875	2.635	0.120	1.666	3.40	1.28
3"	330DBWALP10	3.500	3.260	0.120	1.727	3.54	1.71
4"	340DBWALP10	4.500	4.260	0.120	2.126	4.02	2.22
5"	350DBWALP10	5.563	5.295	0.134	2.112	4.05	2.74
6"	360DBWALP10	6.625	6.357	0.134	2.326	4.42	4.36
8"	380DBWALP10	8.625	8.229	0.198	2.906	6.00	13.89
NB	Part No.	ϕA	ϕB	[T]	[C]	[D]	Mass
		(mm)					(kg)
1/2"	305DBWALP10	21.3	17.1	2.1	26.5	48.8	0.077
3/4"	307DBWALP10	26.7	22.5	2.1	32.2	55.6	0.136
1"	310DBWALP10	33.4	27.9	2.8	34.8	63.8	0.172
1.1/4"	312DBWALP10	42.2	36.6	2.8	38.5	74.2	0.290
1.1/2"	315DBWALP10	48.3	42.7	2.8	35.9	71.6	0.290
2"	320DBWALP10	60.3	54.8	2.8	37.1	80.0	0.408
2.1/2"	325DBWALP10	73.0	66.9	3.0	42.3	86.4	0.581
3"	330DBWALP10	88.9	82.8	3.0	43.9	89.9	0.776
4"	340DBWALP10	114.3	108.2	3.0	54.0	102.1	1.007
5"	350DBWALP10	141.3	134.5	3.4	53.6	102.9	1.243
6"	360DBWALP10	168.3	161.5	3.4	59.1	112.3	1.978
8"	380DBWALP10	219.1	209.0	5.0	73.8	152.4	6.300

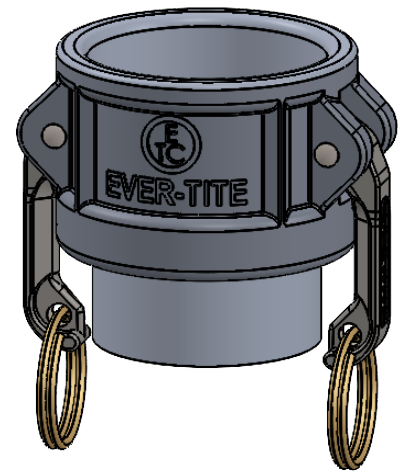

Pipe schedule to ASTM B36.10

See 3XXDAL-CUST for overall part dimensions.

It is recommended to remove seals during welding.

apg EVER-TITE
COUPLING PRODUCTS
5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

Part DBW Aluminum Coupling Half,
Female by Schedule 10 Pipe Butt Weld
CUSTOMER DRAWING

4				MATERIAL: ALUMINUM BODY SS HANDLES SS PINS SS RINGS NITRILE GASKET
3				
2				
1				
REV.	DATE	REASON FOR ISSUANCE	BY	WEIGHT: See table



DO NOT SCALE DRAWING

SHEET 1 OF 1

4

3

2

1