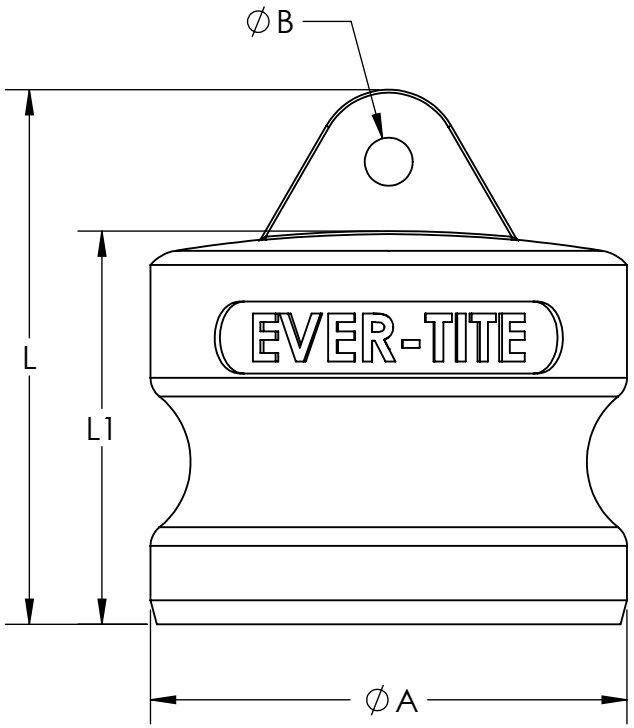

NB	Part No.	∅A	∅B	L	L1	Mass
		(inches)				(lbs)
1/2"	305DPSS	1.000	0.188	1.406	1.063	0.15
3/4"	307DPSS	1.261	0.160	1.562	1.063	0.32
1"	310DPSS	1.443	0.250	1.842	1.404	0.36
1.1/4"	312DPSS	1.790	0.250	2.278	1.563	0.60
1.1/2"	315DPSS	2.100	0.313	2.493	1.806	0.99
2"	320DPSS	2.482	0.313	2.814	2.126	1.44
2.1/2"	325DPSS	2.982	0.250	2.750	2.158	1.70
3"	330DPSS	3.600	0.313	2.813	2.063	2.41
4"	340DPSS	4.705	0.406	3.359	2.361	3.65
5"	350DPSS	5.723	0.313	3.063	2.330	5.27
6"	360DPSS	6.926	0.375	3.913	2.523	7.34
NB	Part No.	∅A	∅B	L	L1	Mass
		(mm)				(kg)
1/2"	305DPSS	25.4	4.8	35.7	27.0	0.07
3/4"	307DPSS	32.0	4.1	39.7	27.0	0.15
1"	310DPSS	36.7	6.4	46.8	35.7	0.16
1.1/4"	312DPSS	45.5	6.4	57.9	39.7	0.27
1.1/2"	315DPSS	53.3	7.9	63.3	45.9	0.45
2"	320DPSS	63.0	7.9	71.5	54.0	0.65
2.1/2"	325DPSS	75.7	6.4	69.9	54.8	0.77
3"	330DPSS	91.4	7.9	71.4	52.4	1.09
4"	340DPSS	119.5	10.3	85.3	60.0	1.66
5"	350DPSS	145.4	7.9	77.8	59.2	2.39
6"	360DPSS	175.9	9.5	99.4	64.1	3.33

DIMENSIONS TO STANDARD A-A-59326/11
(FORMERLY MIL-C-27487G MS27029E)
EXCEPT 1/2" AND 5"

APG RESERVE THE RIGHT TO UPDATE PRODUCTS WITHOUT NOTIFICATION

apg EVER-TITE®
COUPLING PRODUCTS
5324 SOUTH NATIONAL DRIVE, KNOXVILLE, TN 37914 USA

REV.	DATE	REASON FOR ISSUANCE	BY
5			
4			
3			
2			
1			

MATERIAL: STAINLESS STEEL (316) BODY

WEIGHT: SEE TABLE

MACHINING TOLERANCES:

.X	±.03
.XX	±.015
.XXX	±.005
ANGULAR	± 1°
RADII	1/16"

UNLESS OTHERWISE SPECIFIED
REMOVE ALL CASTING RESIDUE.
BREAK ALL SHARP EDGES.
DEBURR AFTER MACHINING.
THREADS ARE CLASS 2 FIT.
DRAFT ANGLE ≤ 2°
CONCENTRICITY WITHIN .005
CAST FINISH 125-250 RMS.
MACHINE FINISH 32-64 RMS.
ALL DIMENSIONS IN INCHES.

DRAWN BY	Stephen Adams
DATE DRAWN:	June 6th 2024
APPROVED BY:	Andy Heaton
DATE APPROVED:	June 6th 2024

INFORMATION ON THIS DRAWING IS CONFIDENTIAL. IT MAY NOT BE USED WITHOUT PRIOR WRITTEN CONSENT OF THE OWNER.

Part DP Stainless Steel Coupling Half, Plug, Dust (Type X).
Customer Drawing.

SIZE: A4 | DWG: 3XXDPSS-CUST | REV 0

SCALE: 1:2 | DO NOT SCALE DRAWING | SHEET 1 OF 1